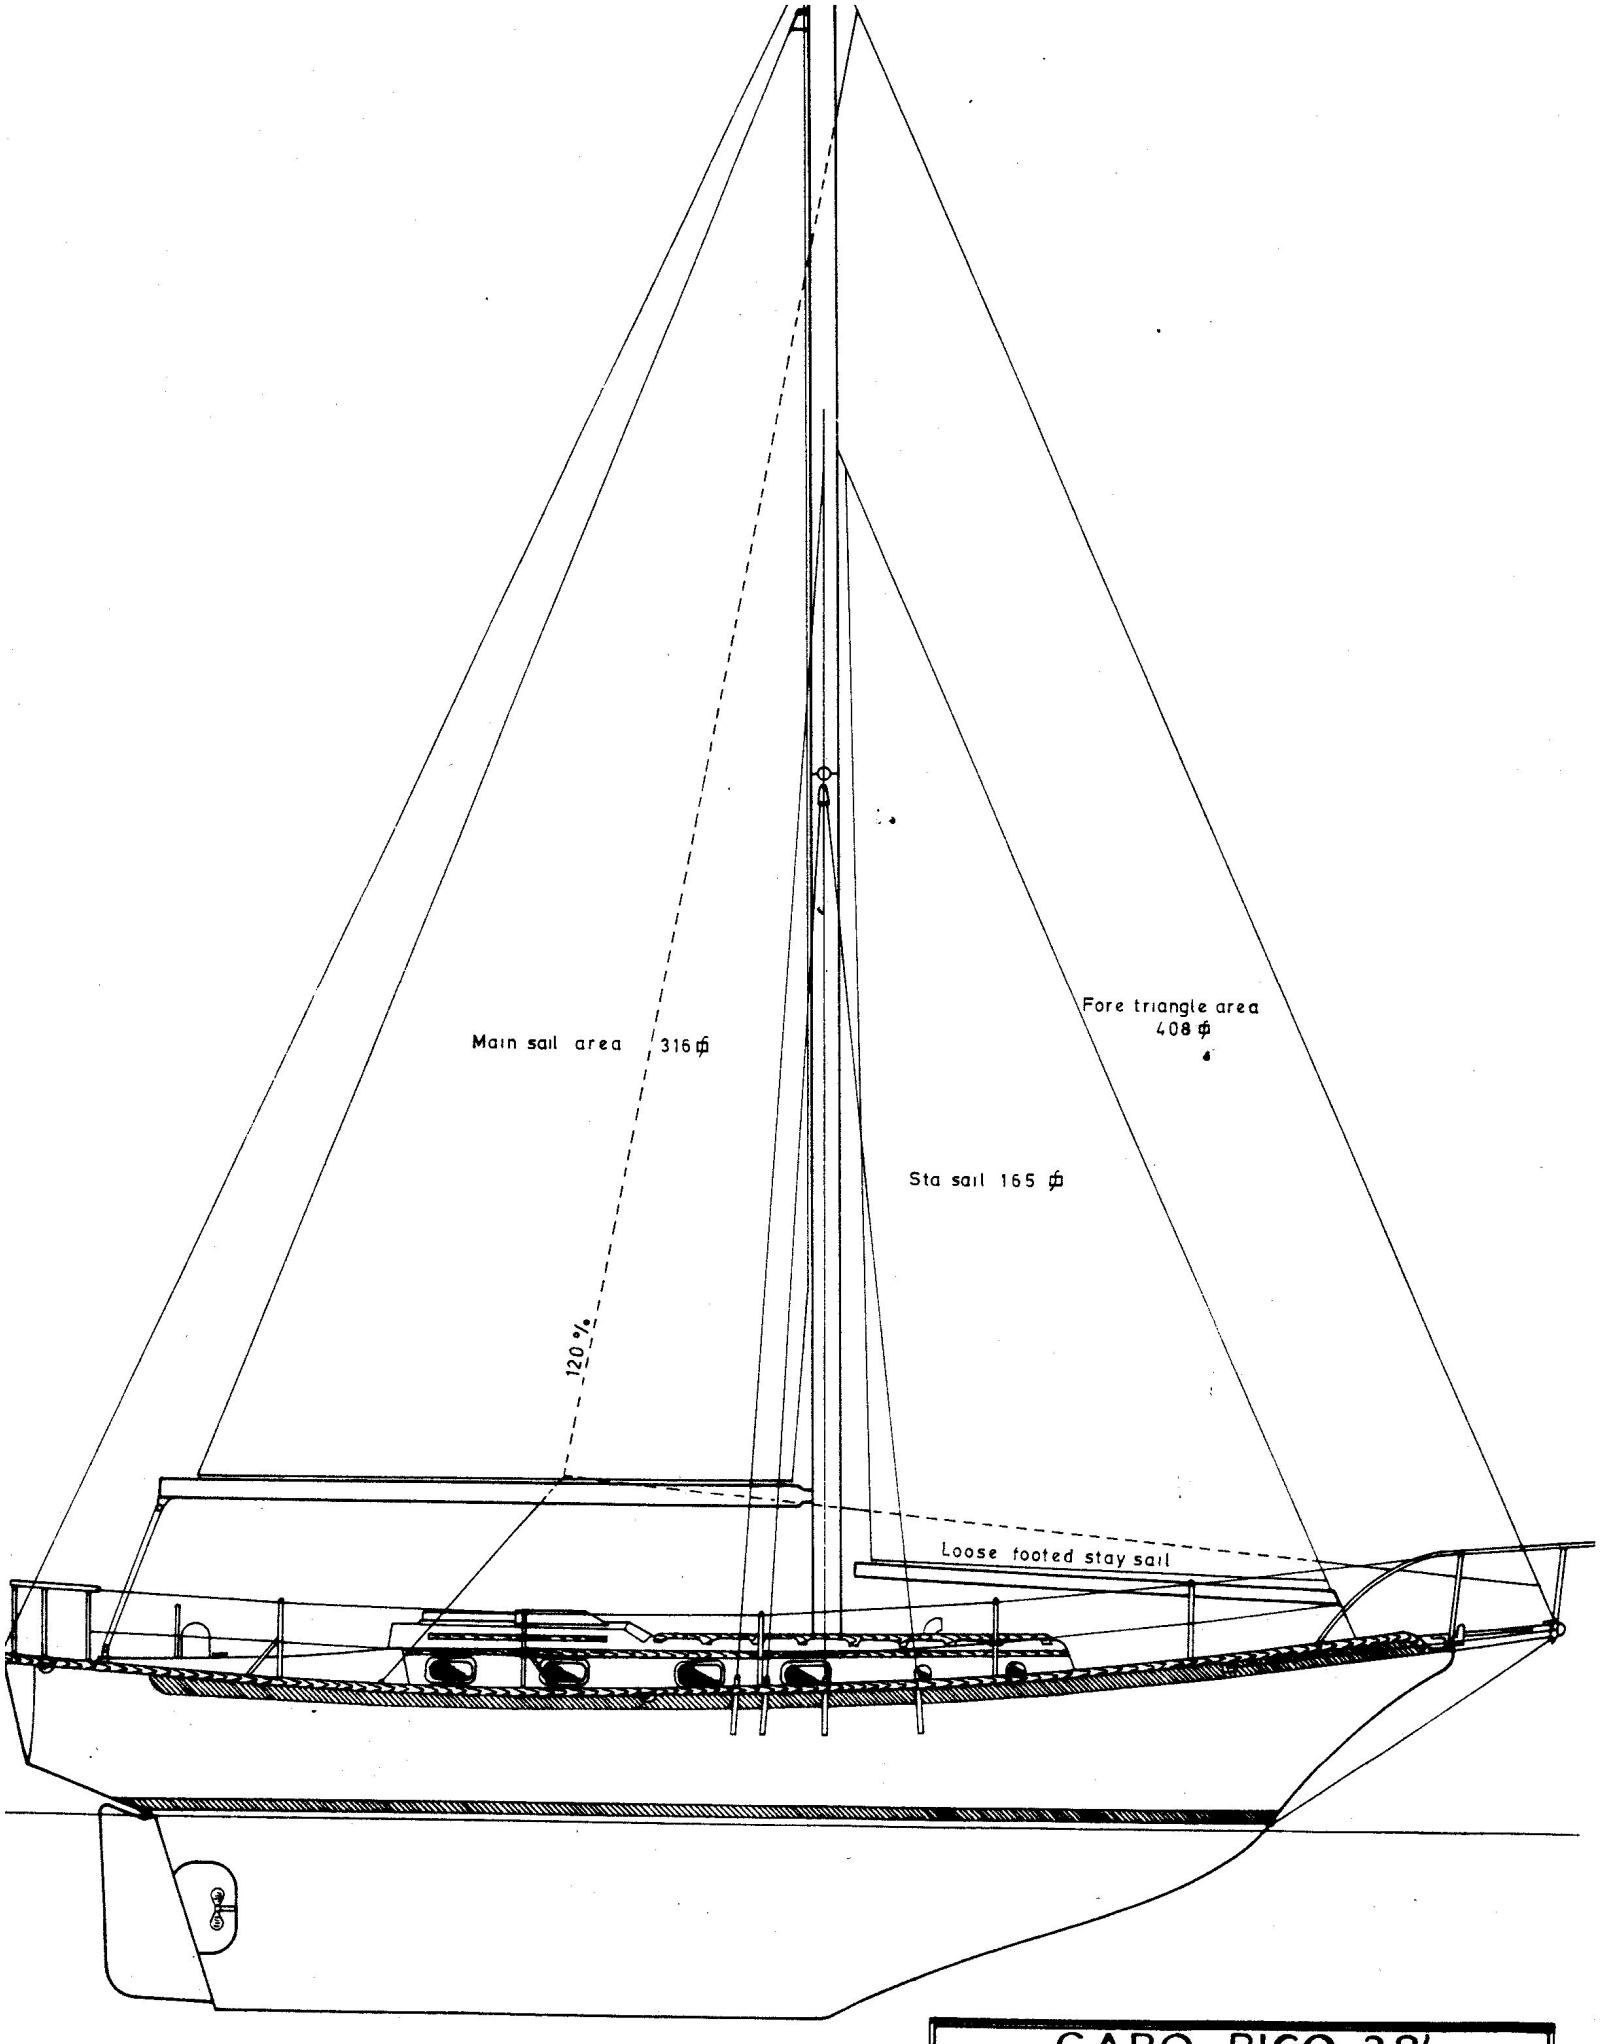
Main sail area 316 ft
Fore triangle area
408 ft
Sta sail 165 ft
120 %
Loose footed stay sail

CABO RICO 38'

LUXURY SAILING AT ITS FINEST

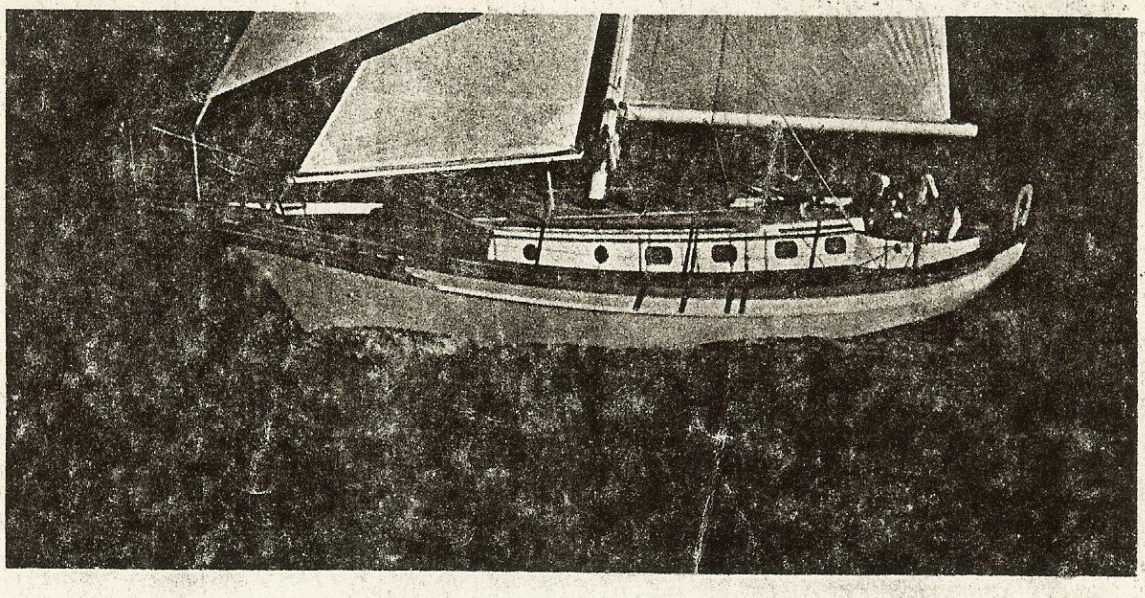

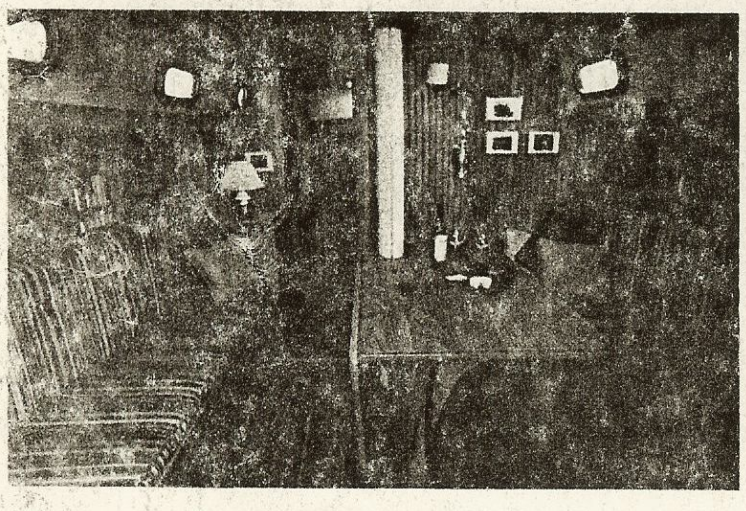

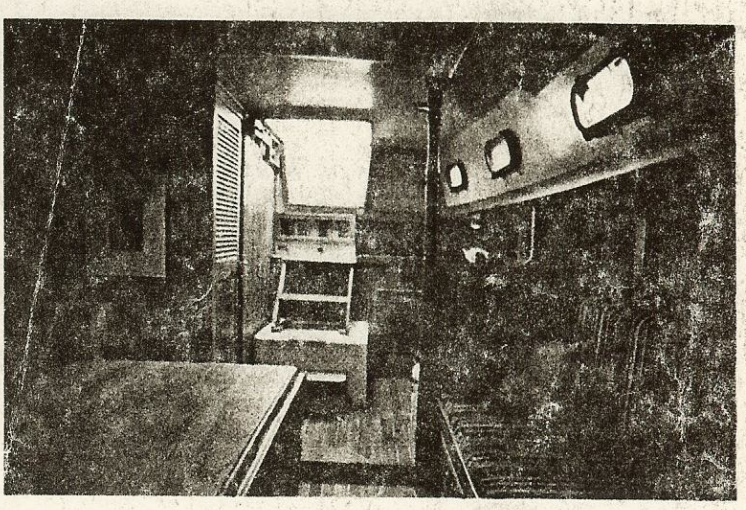

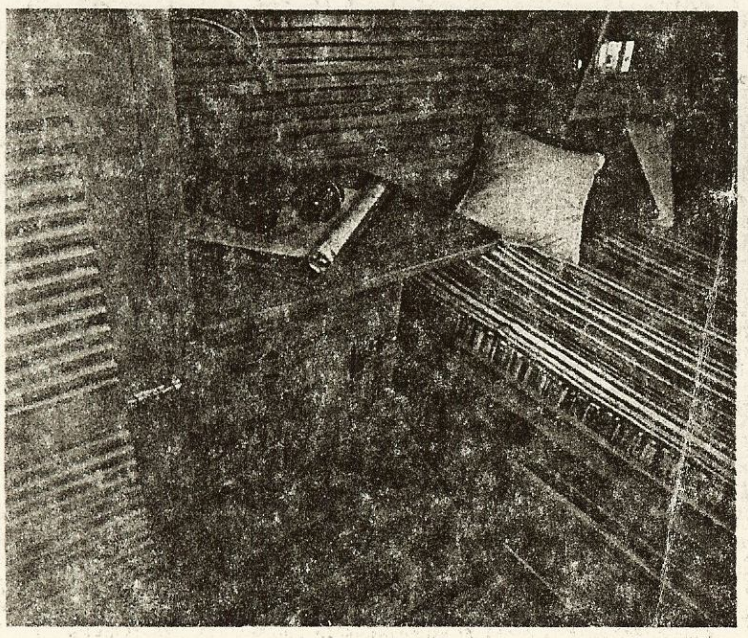

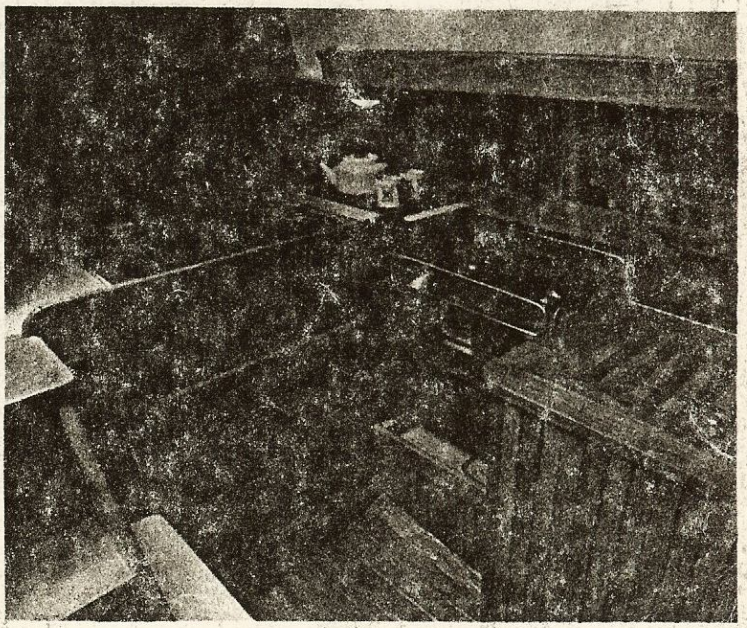

A Traditional Cutter for the Knowledged Yachtsman

Cabo Rico 38

SPECIFICATIONS

L.O.A.	41' 00" (12.50 m)
L.O.D.	38' 00" (11.58m)
L.W.L.	29' 3" (8.86 m)
Beam:	11' 4" (3.45 m)
Draft:	5' 00" (1.52 m)
Displacement:	20,000 lbs. (9,071 kg.)
Ballast:	7,800 lbs. (3,538 kg.)
Sail Area:	750 sq. ft. (69.67 sq. m)
Freshwater Capacity:	120 gals. (456 liters)
Fuel Capacity:	80 gals. (304 liters)
Holding Tank Capacity:	40 gals. (151 liters)
Sleeping Capacity:	7

Photographs in this catalog may illustrate equipment that is optional. The right is reserved to make changes at any time without prior notice in prices, specifications, standard equipment, materials and models.

Contact:

CABO RICO (USA) INC.

P.O. Box 2807 / Miami, FL 33140-0807

or Manufacturer

FIBRO TECNICA S.A.

P.O. Box 10306, San José / 1000 Costa Rica
Telephone: 24-23-33
Telex: 2143 ELECTRA / Cable: ALESA

Marine Division of GRUPO ELECTRA S.A.

The Cabo Rico is a sailing yacht built without compromise. She's a yacht built for far horizons. A sailor's sailboat. Impressive in every way. Her appearance is traditional and practical, so the **Cabo Rico 38** is not susceptible to the vagaries of modern sailing fads. In other words, it's an excellent investment.

The beauty of the **Cabo Rico 38** is more than skin deep, for she is heavily built. Her hull exceeds today's demanding construction standards using the latest technology in fiberglass manufacturing.

The most outstanding attribute of the **Cabo Rico 38** is undoubtedly the total commitment to quality. The craftsmanship and detailing simply must be seen to be believed. In a word, it's exquisite. Aficionados of quality will immediately recognize that the **Cabo Rico 38** compares absolutely with the finest names in glass sailboat business. And we mean the finest names.

The **Cabo Rico 38** sails easily on all points of sail. She has a fine entry for good windward performance. Her long keel enhances comfort and reduces fatigue on long voyages. Her cutter rig is the choice of seasoned cruising sailors for its versatility, and it is probably the best rig for single handling. The self-tending club staysail allows simple tacking in narrow passages; reef the staysail and you have a convenient yet competent storm sail.

True cruising amenities abound — ample storage, generous tankage with inspection ports, large U-shaped airy galley, cedar-lined hanging closets, excellent ventilation, with 13 bronze opening ports, three overhead hatches and two extra-large cowl vents.

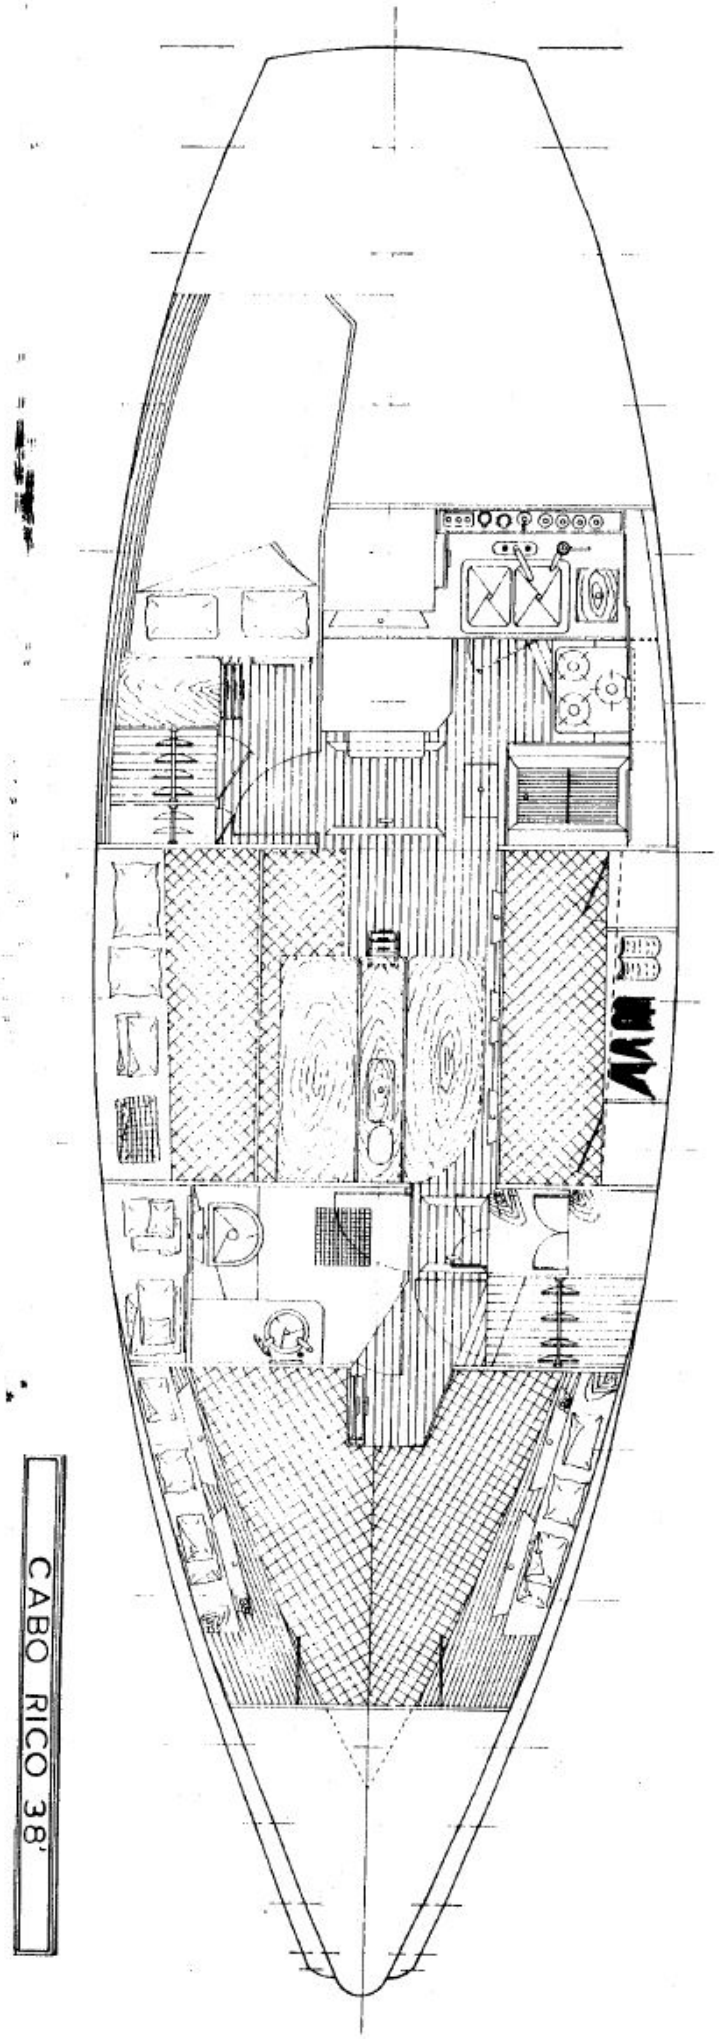
CABO RICO 38'

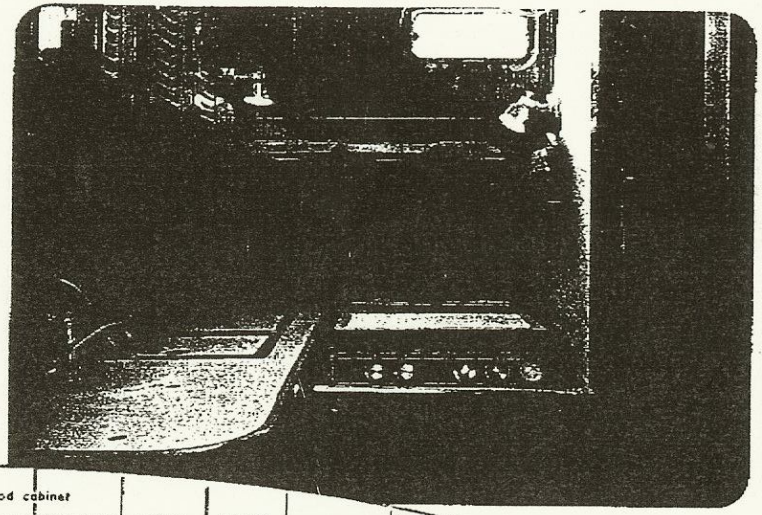

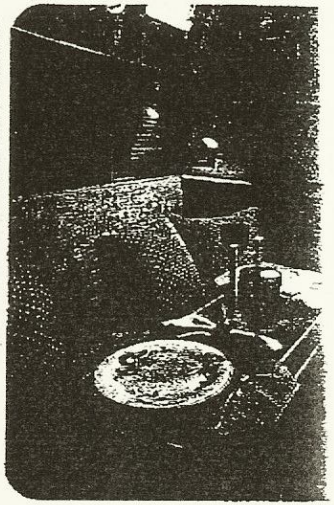

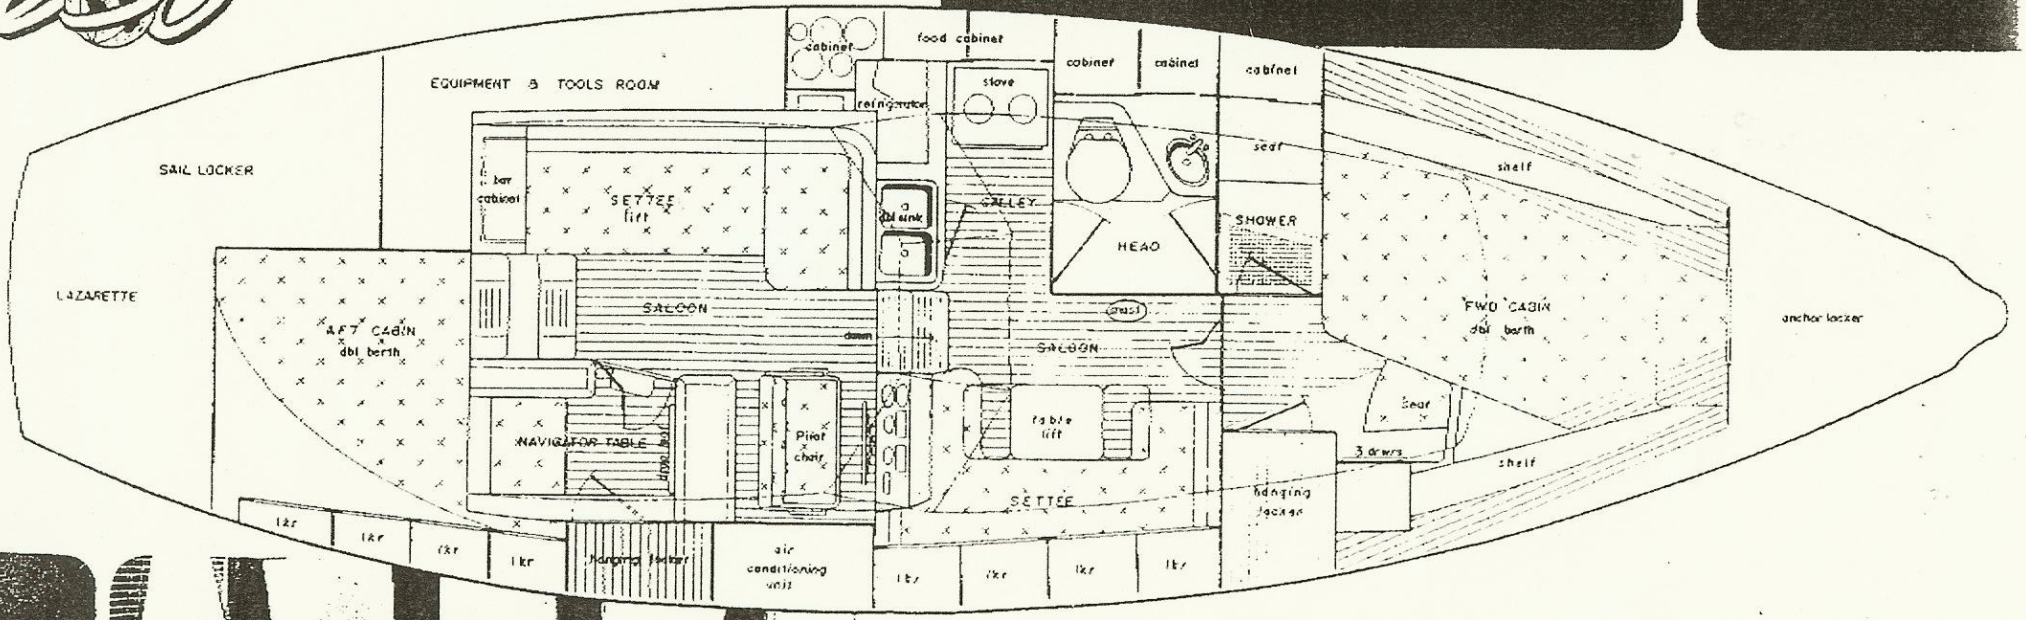

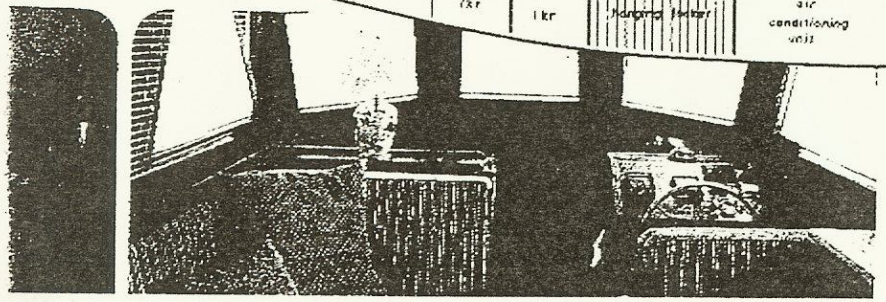

These cameras control cruise selection switches. Illegible

SPECIFICATIONS

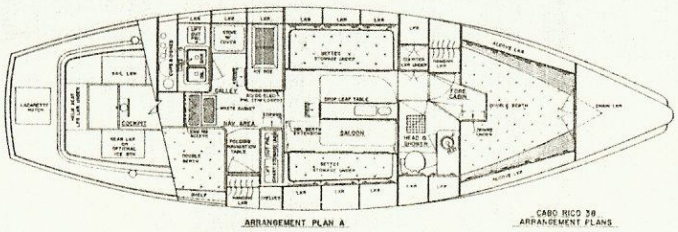

ARRANGEMENT PLAN A

CABO RICO 38
ARRANGEMENT PLANS

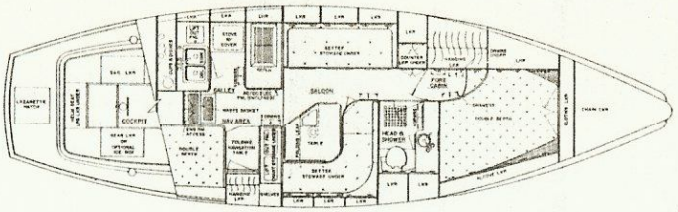

ARRANGEMENT PLAN B

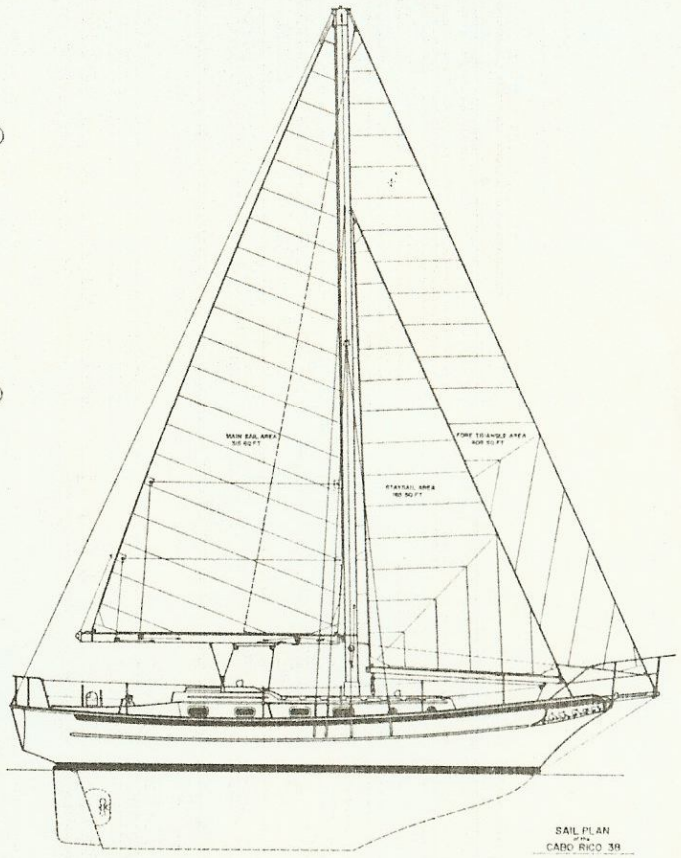

SAIL PLAN
CABO RICO 38

- LOA 41'00" (12.50 m)
- LOD 38'00" (11.58 m)
- LWL 29'3" (8.86 m)
- BEAM 11'6" (3.51 m)
- DRAFT 5' (1.52 m)
- DISP (dry) 20,000 lb (9,071 kg)
- BALLAST 7,800 lb (3,538 kg)
- SAIL AREA 750 sq. ft (69.67 sq. m)
- SPARS – ANODIZED ALUMINUM
- FRESH WATER 120 gals (456 l)
- FUEL 56 gal (211.96 l)
- Holding tank 40 gal (151 l)
- Hull & Deck Construction: One piece hand laid mat/roving w/5/8" balsa core
- Interior Construction – solid teak
- Sleeping Capacity – 7
- Designer: W.I.B. Crealock N.A.

STANDARD FEATURES

- All SS or non-corrosive hardware
- Oversized genoa sheet winches
- Mainsheet winch
- Main/genoa/stays'l halyard winches
- Internal prestretch XLS halyards
- Internal slab reefing & winch
- 3/8" 1-19 SST standing rigging
- Open bodied heavy duty turnbuckles
- Foredeck & masthead anchor lights
- International navigation lights
- Double railed bow/stern pulpit
- Bow sprit w/2 anchor hold devices
- Anchor locker w/teak hatches
- 2 – Dorade vents
- Companionway sea hood w/spray rail
- 3 – teak and plexi open deck hatches
- Screens for ports/hatches/companionway
- 10 – chromed bronze open ports
- P & S winch handle boxes
- Cockpit sail locker – port side
- Cockpit gear locker – starboard side
- Manual bilge pump – cockpit mounted
- Pedestal steerer w/32" SST destr. wheel, 5" compass, engine controls
- Emergency tiller
- Raised helmsman seat
- LPG locker – vented overboard
- 6 – chromed bronze hawse ports/cleats
- 4 – deck scuppers
- Large aft deck lazarette
- Teak – cockpit sole & seats
- Teak cap rails
- Two Interior Plans
- Large F'wd Cabin w/3 drawers, cedar lined hanging locker, overberth storage cabinets, large foot locker, teak louver privacy door, 2 bulkh'd reading lamps, 2 opening ports, large opening deck hatch w/screen, 5" medium density berth cushions w/choice of Scotch Guard fabrics.
- Molded Fiberglass Head w/2 door access, large shower sump, hot/cold pressure water, SST sink, std. marine head w/40 gal. holding tank, enclosed T.P. holder, medicine cabinet, brass towel bar, utility locker w/sliding plexi doors, opening port, dorade vent, teak grate, vanity storage.

MAIN CABIN

- Solid teak/holly cabin sole
- Fire retardant soft headliner
- Solid teak bulkheads, bonded both sides into deck, hull & bilge
- Solid teak furniture/cabin sides/ceilings
- Large pull out double berth, starboard settee
- Single berth port side settee
- Large dinette table w/2 fold-up leaves, 3 drawers, cabinet, liquor locker & gun locker
- Cabin sole dust pan
- Pt & stbd cabinets w/sliding doors
- 3 – bulkhead reading lamps
- 3 – overhead dome lights
- Night lighting

NAV STATION – QUARTERBERTH

- Large fold down nav desk w/3 drawers, top access storage wells, three chart tubes, electronics cabinet
- Cedar lined hanging locker, dbl quarter berth w/5" med density cushion, over berth storage cabinet, large storage drawer under berth, red/white overhead dome light, chart light, bulkhead reading lamp.

GALLEY

- 8 cu ft ice box
- Deep double SST sink
- 4 drawers
- Dish, cup, pot & pan storage
- 2 burner LPG stove/oven w/2-10 lb alum gas tanks, elec shut-down, gauge and manual shut offs
- Food storage cabinets
- Manual fresh water pump
- Hot & cold pressure water
- Solid teak sink covers & stove tray
- Red/white overhead dome light
- 2 – galley dome lights

MECHANICAL

- 50 HP diesel, fresh water cooled
- 55 amp alternator
- Racor fuel/water separator
- 2 – 105 amp deep cycle batteries
- Seawater strainer
- 1 1/4" SST prop shaft
- 18 x 11 two bladed prop
- External shaft bearing
- Heavy duty engine mounts
- Manual bilge pump
- Electric bilge pump

ELECTRICAL

- 12 VDC-110 VAC panel w/circuit breakers, switch "ON" indicator lights, amp and volt gauges, polarity light, color coded stranded copper wiring to the ABYC standards.

NOTE: Specifications are correct as to the date of printing. Cabo Rico USA, Inc., reserves the right to alter specifications without notice. Specifications are within manufacturers prescribed tolerances. Exact specifications are available on each hull upon request. Photos may show optional equipment.

SPECIFICATIONS

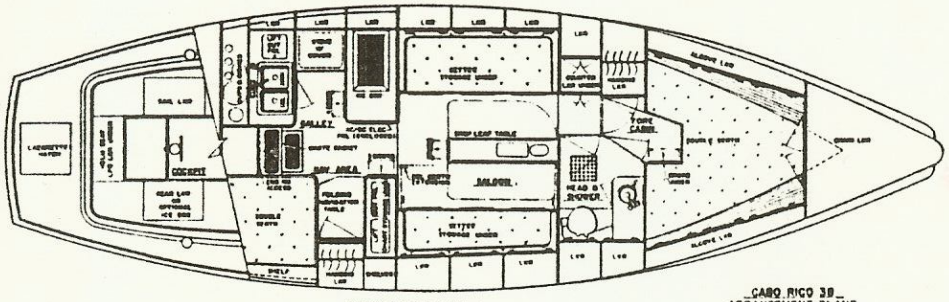

ARRANGEMENT PLAN A

CABO RICO 38
ARRANGEMENT PLANS

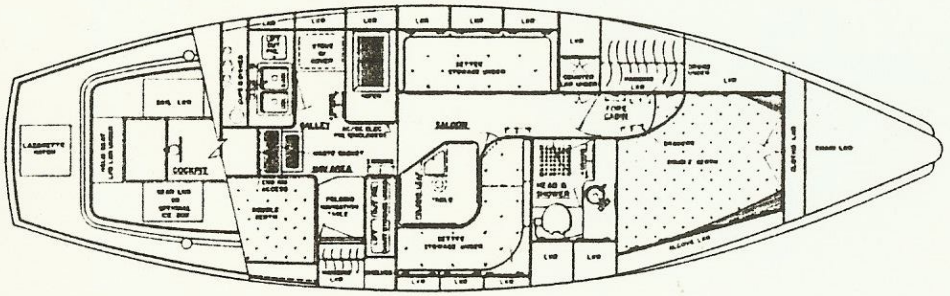

ARRANGEMENT PLAN B

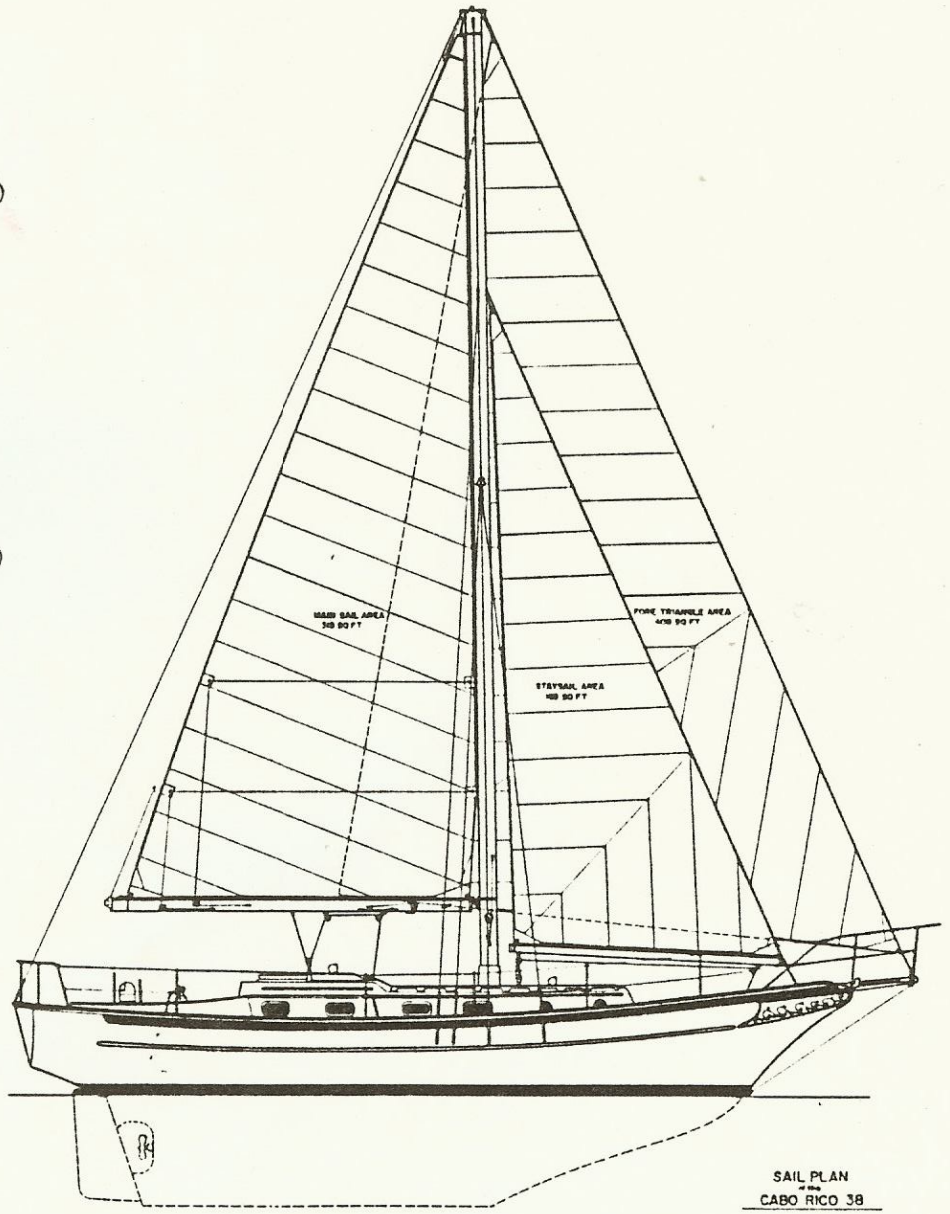

SAIL PLAN
CABO RICO 38